




A . Features

- 6 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- 12 / 24H format selectable
- 1/100 second Chronograph
- EL backlight
- At any setting mode ,press C key to activate Auto Advancing function ;the selected digital will auto advance at 5 times per second till C key is released .

B . Operational Manual

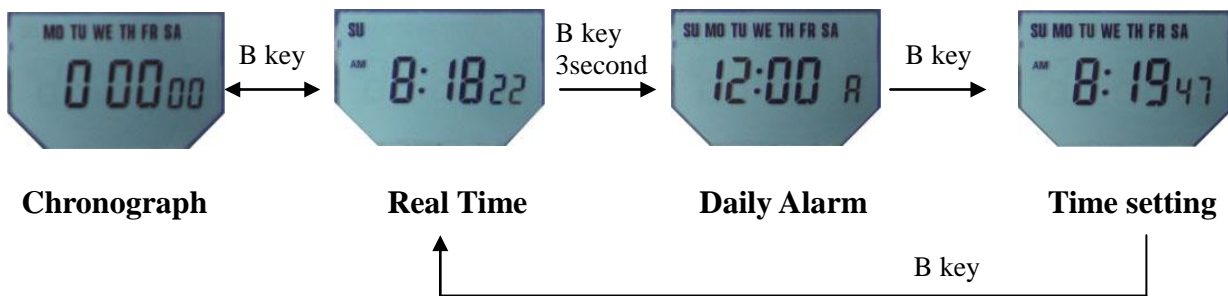

1. At any state ,press A or E key EL backlight for 3s .

2. Real Time

- Press C key to display Alarm ;press D key to display Date .
- Turn ON/OFF Alarm and Chime
Press C + D key to turn ON/OFF Alarm and Chime ,indicator " 🔔 " for Alarm and " 📶 " for Chime . The alarm tone sounds for 30 seconds when the time reach the pre-set time, and it will stop alarm auto after 30 seconds. Press C key to stop alarm.
- Date format selectable
Press D + C key to select Date format "Mon—Day " or "Day—Mon"
- 12 / 24H format selectable
Press C + B key to select 12 / 24H format , Indicator " A " or " P " for 12H format ;otherwise for 24H format .

3. Chronograph

- The display range of the stopwatch is 23 hours, 59 minutes, 59 seconds.
- If you do not stop the stopwatch by hand, it will keep running till reach its limit, and will restart from zero again.
- The stopwatch will run continually even if you exit the stopwatch mode.

To test the time with stopwatch

Elapsed time

D key Start → D key Stop → D key Re-start → D key Stop → C key Clear

Spilt time

D key Start → C key Split → C key Split release → D key Stop → C key Clear

Two Finishes

D key Start → C key Split → D key Stop → C key Split release → C key Clear

First runner Finishes. Display time of First runner.

Second runner finishes. Display time of Second runner.

Display time of Second runner.

4. Daily Alarm

- Alarm setting: under alarm setting mode, "Hour" blinking once entry ; Press D key to select "Hour" or "Minute "setting ; Press C key to adjust the blinking digital ; Press D key to confirm ; Press B key to return to Real Time mode .

5. Time setting

- Under time setting mode, "Second "blinking once entry , ,press C key to zero . Press D key to select the item setting as following in sequence :

Minute → Hour → Month → Day → Day of Week

↑

- Press C key to adjust the blinking digital ;
- Press B key to return to Real Time mode .